

JK Billet Aluminum Oil Cap 3.8L 97-11


Contents: Oil Cap (1)




PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE YOU BEGIN.

Notice: Aluminum holds more heat than plastic. Use caution when removing.

Step 1. Remove the factory oil cap.

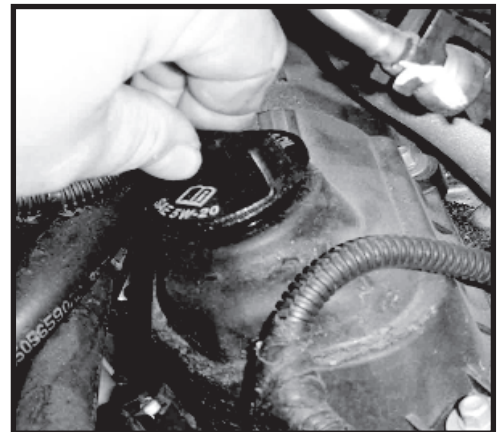

Step 2. Install the new billet oil cap.
Reuse factory O-ring.

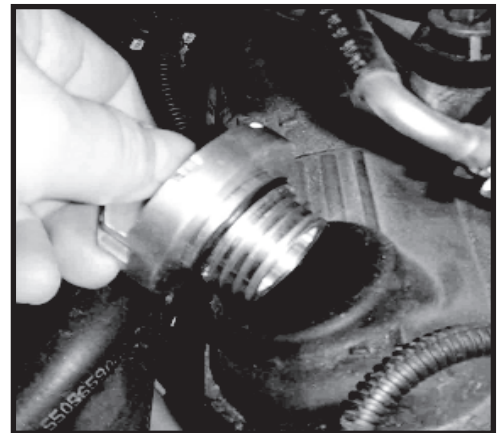

Care and Maintenance: Use soap and water to clean the aluminum surface. Regular cleaning will help maintain the appearance. Do not use harsh chemicals.

For Technical Assistance Contact:
OMIX-ADA Tech Support
Phone: 1-800-449-6649
Email: techsupport@omix-ada.com
Web: www.Omix-Ada.com

Copyright Omix-Ada 2011