

# SPEC-D *Tuning*

## 1996-1998 HONDA CIVIC R8 STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.  
Please wear protection before you work on your vehicle.

An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

10mm Socket

¼" Drive Ratchet

Phillips Screwdriver

Trim Pad Remover

If your Headlight is Halo type, you also need:

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

### Product Part Numbers:

2LHP-CV96JM-8-TM

2LHP-CV96-8-TM



## 1996-1998 HONDA CIVIC R8 STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS




If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.  
Please wear protection before you work on your vehicle.  
An assistant is helpful when removing the front bumper.  
Please be careful while working with the bumper or body part to avoid scratching.  
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Remove all the 10mm bolts from the bottom of the bumper



2. Demonstration in the picture above

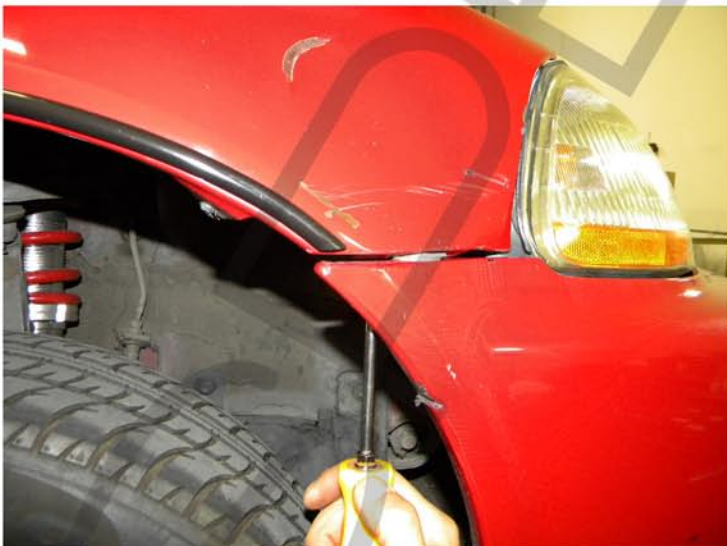

3. Remove screw connecting fender and bumper



4. Top of bumper, there are seven clips



5. Remove seven plastic clips



6. Remove the front bumper



7. Remove the inner 10mm bolt



8. Remove the other 10mm bolt



9. Remove 10mm bolt from the corner of headlight



10. Remove the 10mm bolt near the radiator



11. Pull out the headlight



12. Unplug the harness



13. Unplug the light socket



14. Plug in the light socket



15. Plug in the harness



16. Place Projector headlight in place  
Please see the Halo and L.E.D installation instruction  
If your headlights don't have HALO or L.E.D. You can skip it



17. Tighten top two 10mm bolts



18. Tighten inner 10mm bolt




19. Tighten outer 10mm bolt



20. Replace the front bumper



21. Replace the seven plastic clips

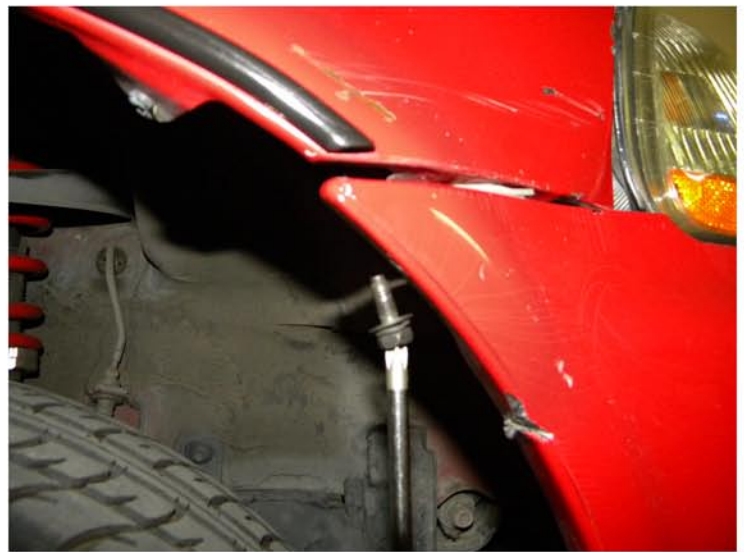

22. Replace screw when the fender meets the bumper



24. Tighten two 10mm bolts



25. Please repeat the picture order from 1 to 25 for the opposite side



26. The installation is now complete