

# CargoEase Locker Installation

## Congratulations and Thank You for purchasing a CargoEase Locker

### Please read instructions thoroughly before beginning installation!!

**Step 1:** Un-wrap your new Cargo*E*ase *L*ocker and check to ensure that there is no shipping damage.

Step2: With assistance place Locker into truck bed. We recommend to place a piece of cardboard covering the floor of the truck box to avoid scratches.

#### Positioning the front of the Locker


**Step 3:** Using a measuring tape, measure across the front of the truck box bulkhead and mark center of the bulkhead at the same height up from the floor of the truck box as the locker top.

Step 4: Using a measuring tape, measure across the front of the Locker top and mark center

**Step 5:** Push the *L*ocker forward ensuring the frame is against the front bulkhead of the truck box aligning the 2 marks.

### Securing the Locker into the Truck Bed:

**Step 6a:** On each side of the *L*ockers there are Black T Tracks installed (see fig.1) There are also eyelets supplied with each *L*ocker that slide on to the T Track that simply slide on the T Track and twist clockwise to tighten down (see fig.2) Position the eyelets so they are straight above in line with the OEM tie downs inside the pickup bed and tighten. Once the eyelets are in place and tightened, use the turnbuckles and carabineer provided, placing the carabineer through the eyelet end of the turnbuckle and then attach to the eyelet on the *L*ocker, next place the hook of end of the turnbuckle through the OEM tie down and tighten until snug. Repeat this step in each of the four corners of the pickup bed.

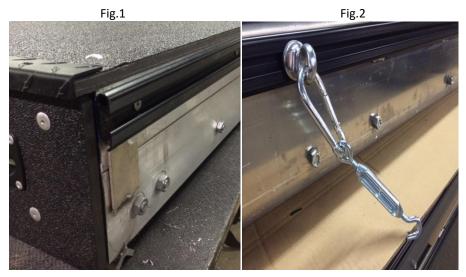

CargoEase Locker Additional Securing