

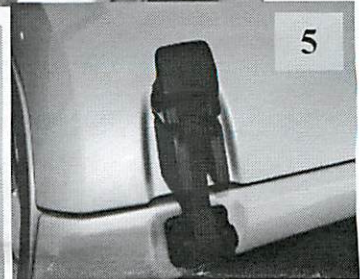



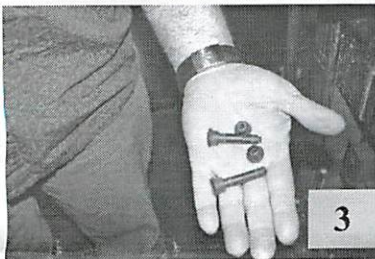

www.DaystarWeb.com
Tech Support Contact Info
Tech@DaystarWeb.com
Phone: 623.907.0081
Fax: 623.907.0088
841 South 71st Ave.
Phoenix, AZ 85043

KJ09145/KJ09146
HOOD WRANGLER
97-12 JEEP WRANGLER TJ/JK

1. **INITIAL INSTALL MUST BE COMPLETED AT 70 DEGREES OR HIGHER**
2. Open the hood latches and remove the lower hood catch. (1)
3. The rubber portion of the latch is secured to the hood latch pieces by two plastic pins. With the hood latch removed from the JEEP use 2 vise grips and clamp to the 2 ends of the plastic pin and twist them until they break. Remove and discard the pins and rubber pieces.(2,3)
4. Install the Hood Wrangler with the flat side towards the lower portion of the latch (the part that attaches to the fender) using the supplied bolt and nut with thread lock on the bolt.(4)
5. Attach the upper portion of the latch to the opposite end of the Hood Wrangler using the supplied bolt and nuts .
6. Reinstall the hood latch.(5)

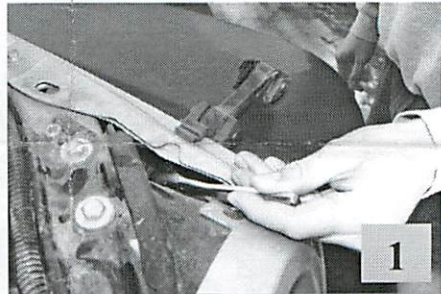

Warranty:

Daystar Products carry a limited warranty: This Limited Warranty does not include normal wear and tear and is void if product shows any evidence of misuse, abuse, accident/collision, road hazard, improper installation and or maintenance or modification. This warranty does not cover cost of removal, installation, shipping or other incidental charges. **ALL WARRANTY ISSUES MUST BE ACCOMPANIED BY A SALES RECEIPT WITH TRANSPORTATION OR SHIPPING CHARGES PREPAID.** This warranty extends only to the original purchaser of the Daystar Products



Instruction Sheet P11419
2009 Daystar Products International Inc.