

SPEC-D *Tuning*

2003-2006 CADILLAC CTS FRONT GRILL HONEYCOMB MESH INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.


TOOLS AND SUPPLIES REQUIRED

Phillips Screwdriver

Trip Pad Remover

Product Part Numbers:

HG-CTS03C-V2-RS

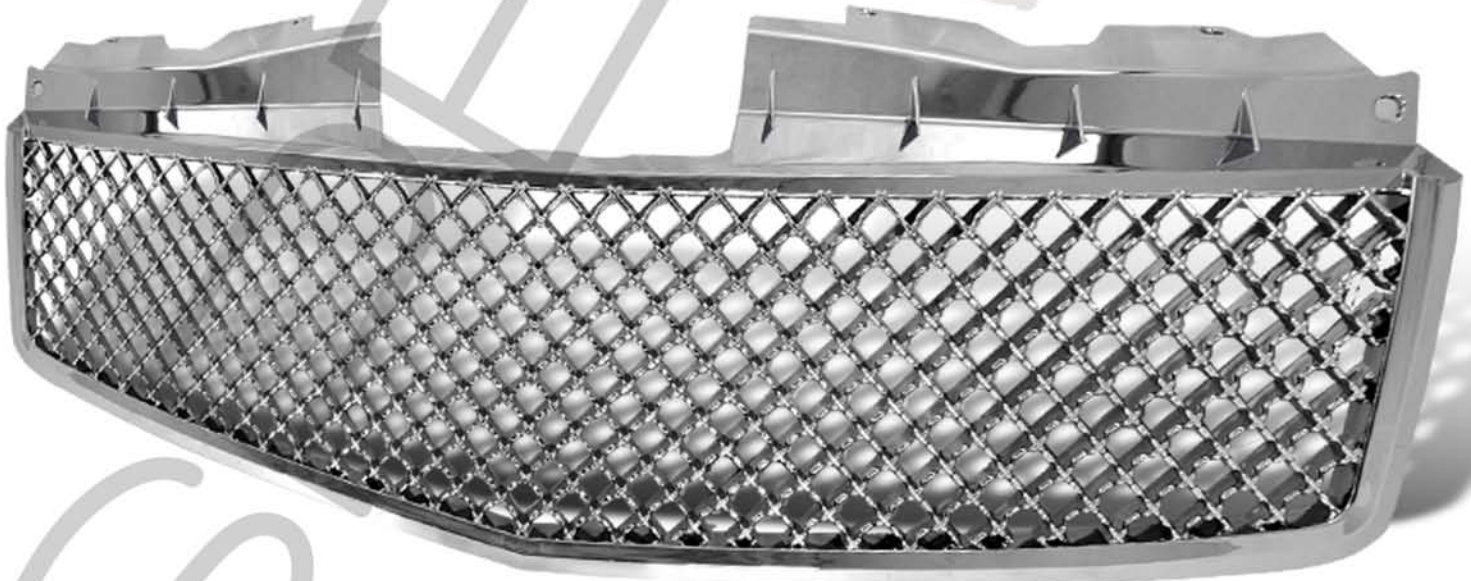

2003-2006 CADILLAC CTS FRONT GRILL HONEYCOMB MESH INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Remove the rubber guard



2. Plastic clip location



3. Remove the plastic clips on the top of the grill



4. Remove the plastic clips on the top of the grill



5. Remove the plastic clips on the top of the grill



6. Phillips head screws location (8 total)



7. Remove the phillips head screws (8 total)



8. Phillips head screws location (8 total)



9. Remove the phillips head screws (8 total)



10. Phillips head screws location (8 total)



11. Remove the phillips head screws (8 total)



12. Remove the front grill



13. Place the new grill in the stock location



14. Replace and tighten the (8) phillips screws



15. Place the (6) plastic clips on the top side of grill



16. Plastic clips location



17. Replace the rubber guard



18. The installation is now complete

