

SPEC-D *Tuning*

2006-2007 ACCORD 4DR FOG LIGHTS INSTALLATION INSTRUCTIONS

*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.

*Please wear protection before you work on your vehicle.

*An assistant is useful when removing the front bumper from your vehicle.

*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.

*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



TOOLS AND SUPPLIES REQUIRED

½" Drive Ratchet

Cutter

10mm Socket

Pliers

Phillips Screwdriver

Trim Pad Remover

Box Cutter

Test Light

Product Part Numbers:

LF-ACD064AMOEM-RS



2006-2007 HONDA ACCORD 4DR FOG LIGHTS INSTALLATION INSTRUCTIONS

- *If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.
- *Please wear protection before you work on your vehicle.
- *An assistant is useful when removing the front bumper from your vehicle.
- *Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. (4) 10mm bolts location




2. Remove the (4) 10mm bolts



3. (6) plastic clips location



4. Remove the (6) plastic clips

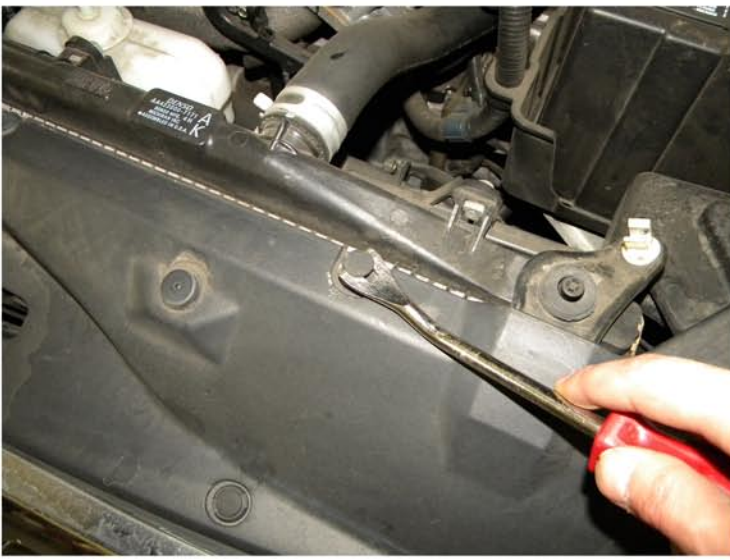

5. Remove the (10) plastic clips



6. Remove the plastic moulding



7. Remove the phillips head screw



8. Tug on the sides of the front bumper



9. Remove the front bumper



10. (5) plastic tabs location



11. Undo the mounting tabs



12. Remove the fog light hole cover



13. Cut the area marked




14. Cut the bumper



15. Bumper cut



16. Install the (2) spring nuts

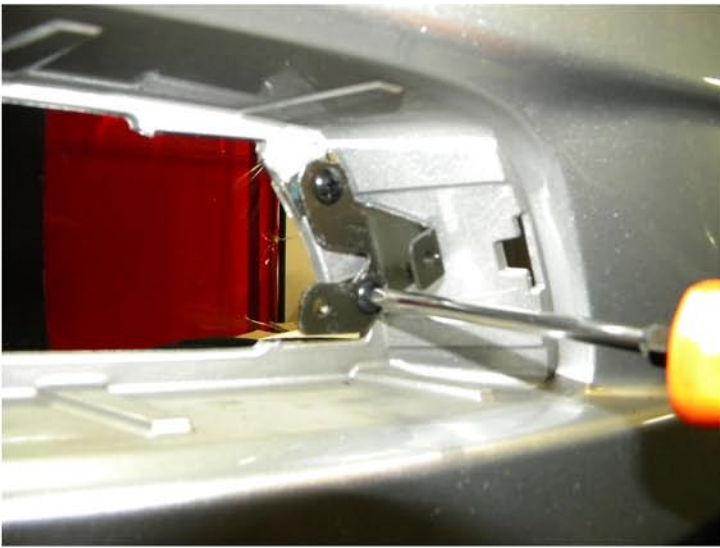

17. Secure mounting bracket with (2) phillips head screws



18. Place the phillips screw in the fog light assembly



19. Place the fog light in the fog light hole



20. Tighten the phillips head screw



21. Remove the plastic clip



22. Remove the hood latch cover



23. Loosen the 10mm bolt



24. Secure the fog light harness ground wire to the 10mm bolt



25. Zip the fog light harness onto the factory harness



26. Replace the hood latch cover and the plastic clip




27. Remove the phillips head screw



28. Remove the lower dash board cover




29. Remove the dashboard under cover

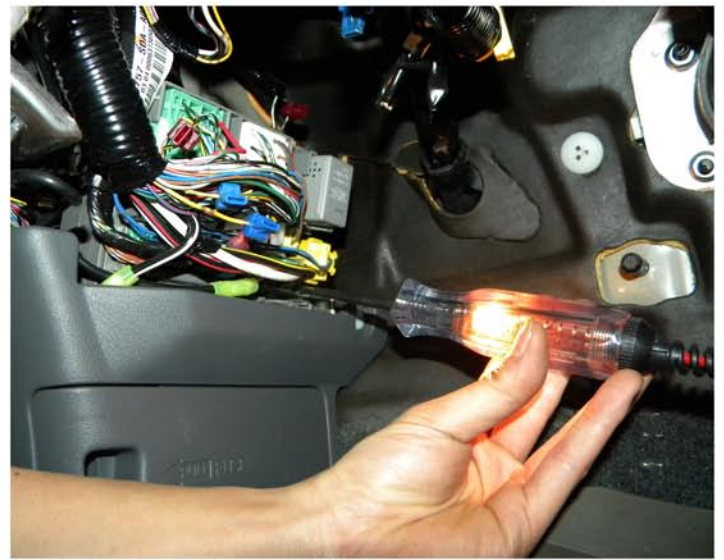

30. Use the test light to locate the battery power line and the ACC power line




31. Loosen the 10mm bolt

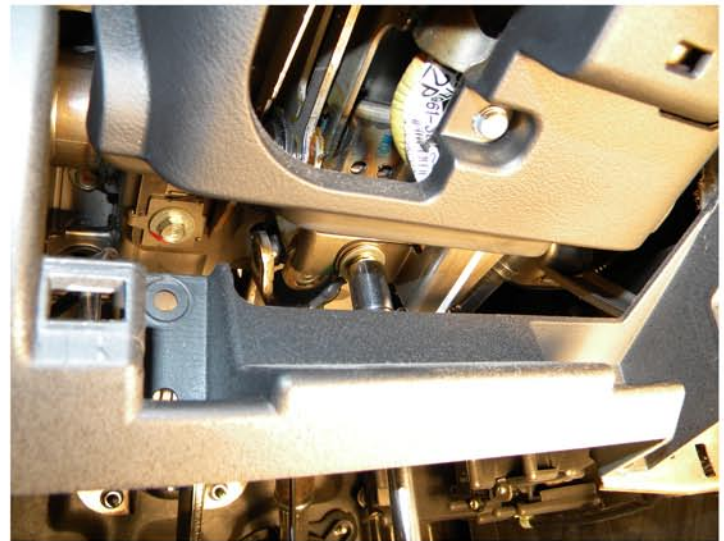


32. Secure the switch harness ground wire with the 10mm bolt



33. Cut a slit in the rubber grommet

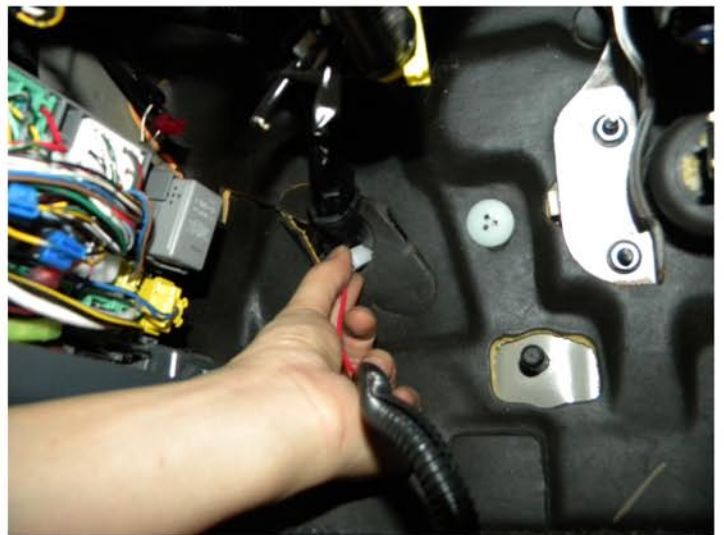

34. Run the switch power wire through the rubber grommet

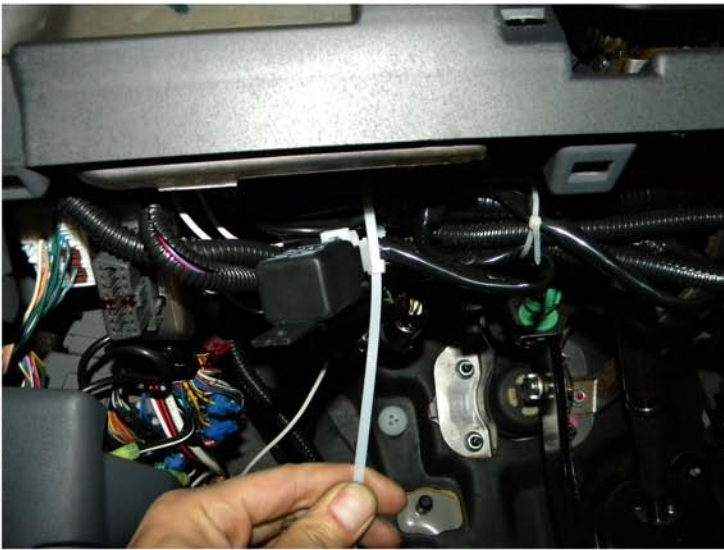

35. Zip the excess wire onto the factory wire harness



36. Replace the dashboard under the cover



37. Connect the switch harness to the fog light switch



38. Replace the dashboard and lower the cover



39. Tighten the phillips head screw



40. Pull the fog light switch power wire through the rubber grommet



41. Connect the extension wire to the switch power wire



42. Remove the (2) plastic clips



43. Remove the air duct cover



44. Connect the switch power wire extension to the fog light harness



45. Zip the switch power extension wire onto the factory wire harness



46. Replace the air duct cover and the (2) plastic clips



47. Connect the fog light harness to the fog light assembly



48. Replace the front bumper



49. Replace the (10) plastic clips



50. Tighten the (4) 10mm bolts and replace the (6) plastic clips
Please repeat the steps in order from 1 to 50 for the opposite side



51. The installation now is complete

