

# SPEC-D *Tuning*

(for OEM Halogen Headlight model only)

## 2010-UP FORD MUSTANG PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

¼" Drive Ratchet

Trim Pad Remover

7mm Socket

8mm Socket

10mm Socket

### Product Part Numbers:

LHP-MST10-TM

LHP-MST10JM-TM



## 2010-UP FORD MUSTANG PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.


Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. (4) 7mm screws location



2. Remove the (4) 7mm screws

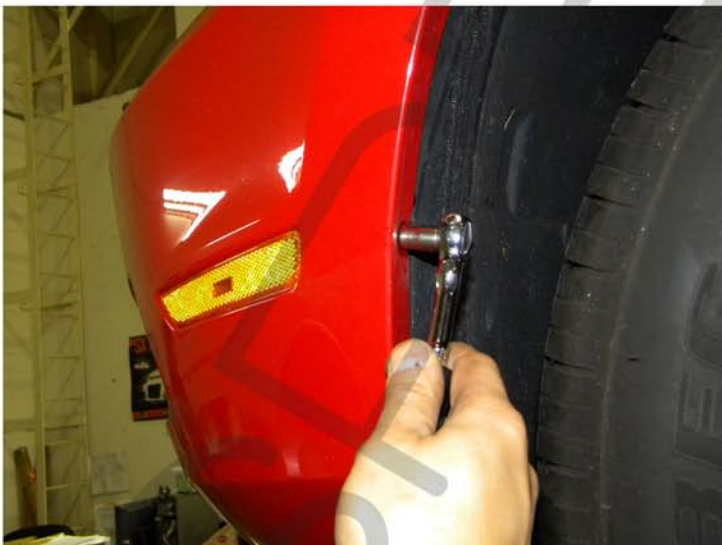

3. Remove the (2) 7mm screws



4. (2) 10mm bolts and (4) plastic clips locations



5. Remove the (2) 8mm screws



6. Remove the (4) plastic clips



7. Pull on the side of the front bumper



8. Unplug the bumper light



9. Remove the front bumper



10. Remove the temp sensor from the bracket on the inner side of the bumper



11. Remove the (4) plastic clips




12. Remove the (4) plastic clips




13. Remove the plastic radiator cover



14. Remove the plastic clip

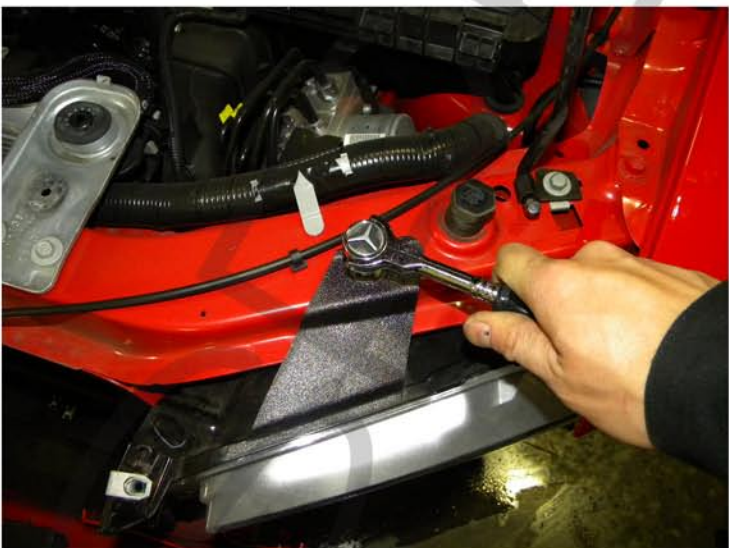

15. Remove the 10mm bolt

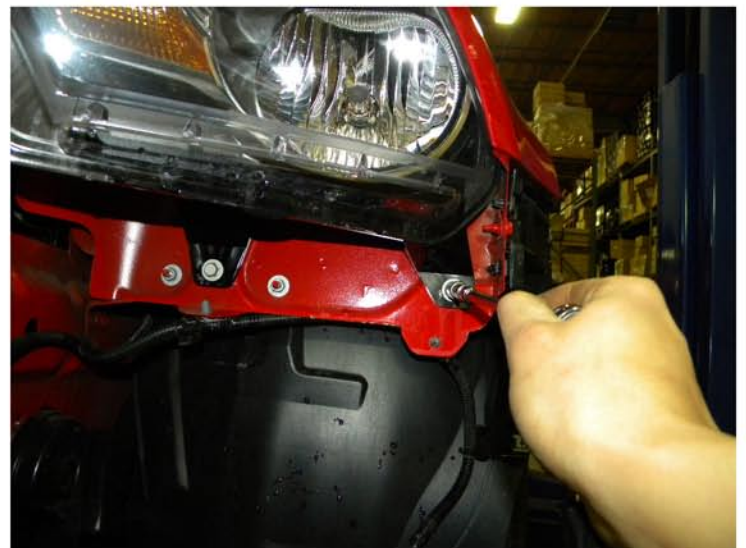

16. Remove the (2) 10mm bolts



17. Unplug the driving light



18. Disconnect the headlight harness



19. Plug the driving light into the new headlight  
Please see the "Halo and L.E.D installation instructions"  
If your headlights don't have HALO or L.E.D. You can skip  
this step



20. Connect the headlight harness to the new headlight



21. Replace the plastic clip



22. Tighten the 10mm bolt



23. Tighten the (2) 10mm bolts



24. Replace the temp sensor onto the bracket



25. Replace the front bumper



26. Plug in the bumper light



27. Replace the plastic radiator cover and secure with the (4) plastic clips



28. Replace the (4) plastic clips on the top side of the front bumper