




Installation & CARE

2003-2007 CADILLAC CTS LED TAIL LIGHTS INSTALLATION

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	10mm wrench	10 mm socket	
			


PRODUCT NUMBER

LT-CTS03CLED-TM
LT-CTS03GLED-TM
LT-CTS03JMLED-TM

LT-CTS03RLED-TM
LT-CTS03RGLED-TM
LT-CTS03BBLED-TM




LET'S START THE INSTALLATIONS

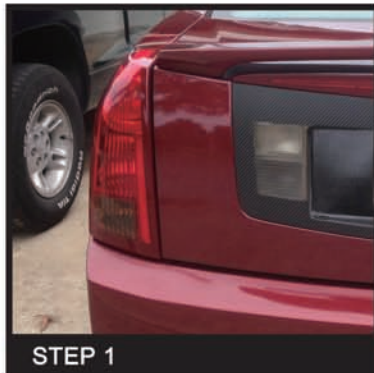


STEP 1

Before installation

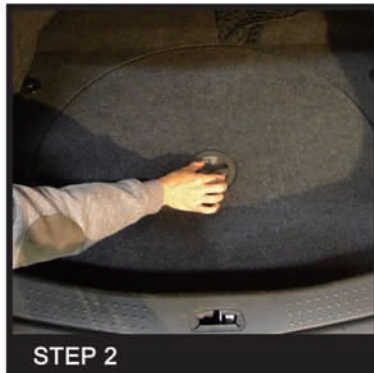

STEP 2

Undo spare tire cover holder

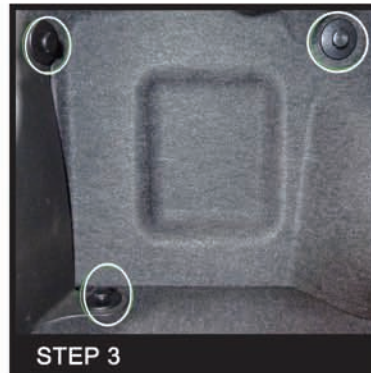

STEP 3

Remove 3 driver side hand bolts




STEP 4

Remove 3 passenger side hand bolts




STEP 5

Shift spare tire cover and remove lining cover

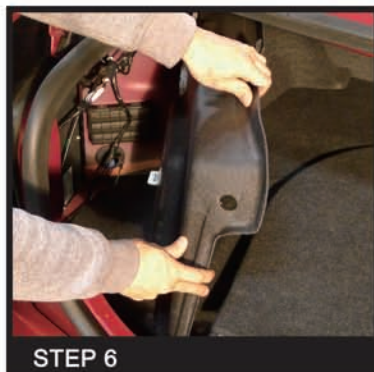

STEP 6

Peel lining

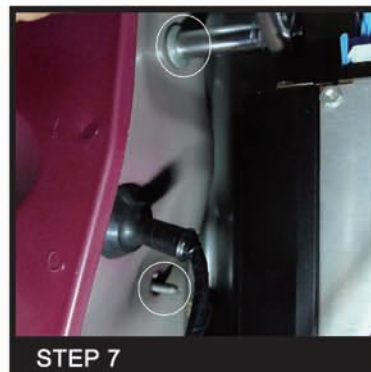

STEP 7

Remove 2 driver side tail light 10mm nuts



STEP 8

Disconnect harness connector



STEP 9

Remove tail light and disconnect grommet from chassis



STEP 10

Install LED tail light grommet and housing



STEP 11

Remove the 10mm bolts




STEP 12

Remove the headlight



STEP 13

Disconnect the headlight harness

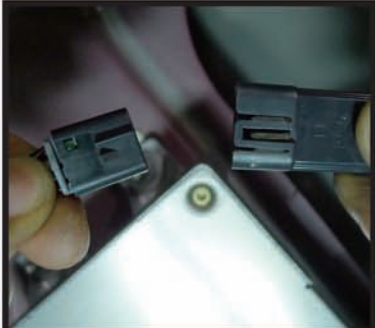

STEP 14

Disconnect the harness from ballast



STEP 15

Remove the (3) Phillips head screws



STEP 16

Remove the ballast



STEP 17

Remove the Phillips head screw




STEP 18

Disconnect the HID socket harness




STEP 19

Remove the access hole cover

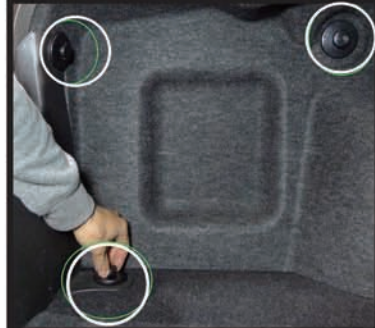

STEP 20

Disconnect ground connector

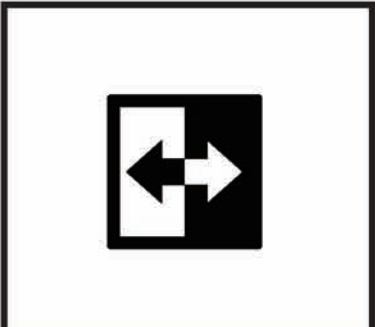

STEP 21

Please repeat the steps from 3 to 20 for the opposite side



STEP 22

Remove the HID bulb



STEP 23

Remove the HID socket harness from the headlight housing



The installation is now complete