

Installation & CARE

2015 - UP GMC YUKON LED TAILLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at local a automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

ST15 screwdriver	Plastic pry bar		
			


PRODUCT NUMBER

LT-YUK15BBLED-TM
LT-YUK15JMLED-TM
LT-YUK15RGLLED-TM

LT-YUK15RLED-TM
LT-YUK15BKLED-TM




LET'S START THE INSTALLATION

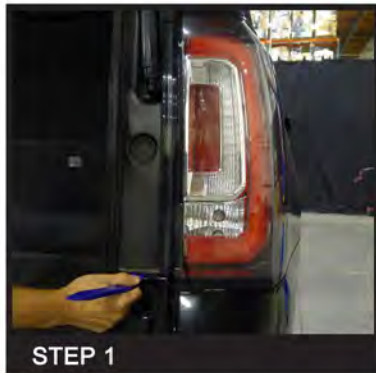


STEP 1

Remove the tail light cover

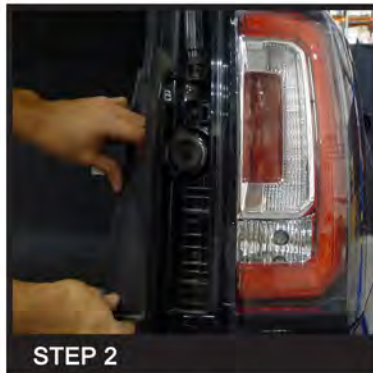


STEP 2

Remove the tail light cover

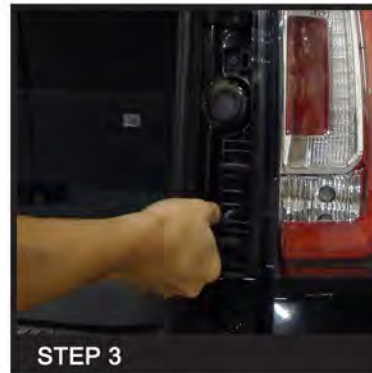


STEP 3

Remove two ST15 screws

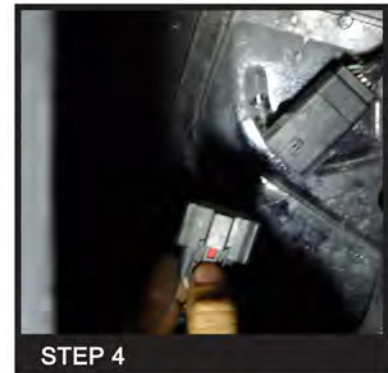

STEP 4

Pull back red tab to unlock the connector and disconnect the connector

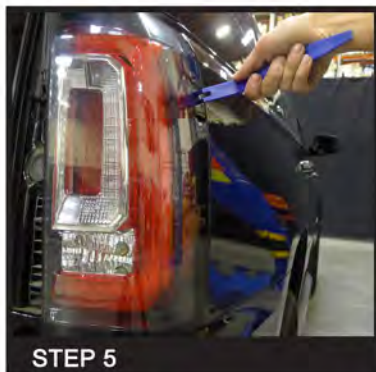


STEP 5

Unseat the tail light



STEP 6

Uninstall the tail light and harness

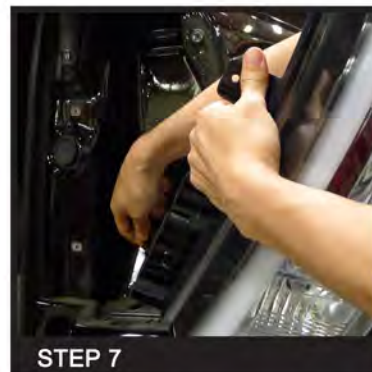


STEP 7

Route the wire harness through bumper




STEP 8

Install the tail light

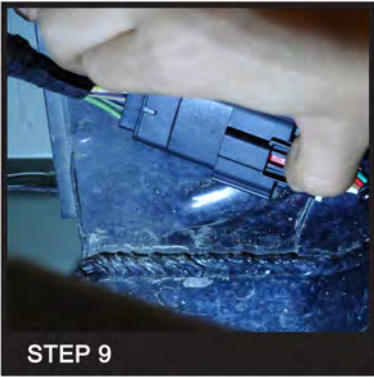


STEP 9

Reconnect the harness and lock tab

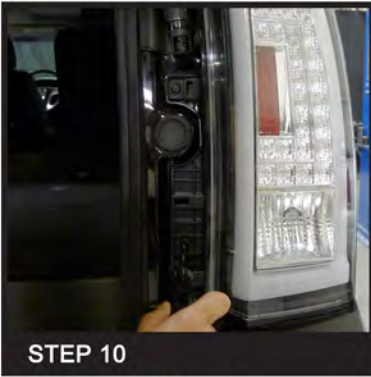


STEP 10

Reinstall two ST15 screws

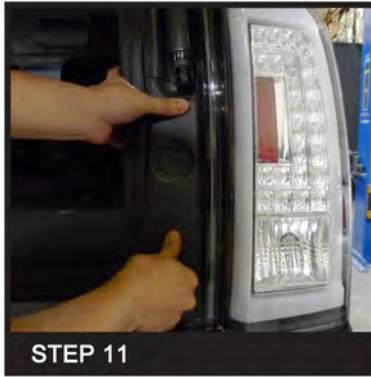

STEP 11

Reinstall the Tail light cover

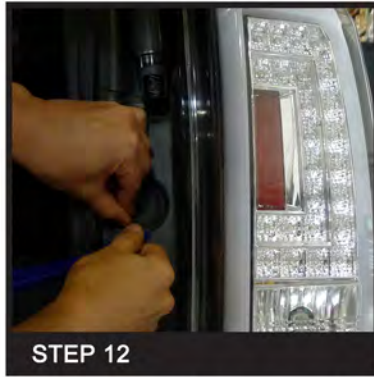

STEP 12

Gently pull grommet edges through tail light cover to seat correctly



STEP 13

Please repeat the steps from 1 to 12 for the opposite side



The installation is now complete