

PRODUCT DESCRIPTION: Headlight
APPLICATION: 2014-2018 GMC Sierra



INSTALLATION GUIDE

READ COMPLETE INSTRUCTIONS BEFORE INSTALLATION
Improper installation may void warranty.



TOOLS NEEDED: 7mm Socket. 10mm Socket. T-10 Torx bit

STEP 1



Factory stock headlights

STEP 2



Open hood and disconnect negative battery cable.

STEP 3



Remove 16 body clip tabs on radiator shroud.

STEP 4



Remove radiator shroud and set aside.

STEP 5



Remove four 10mm bolts from top of radiator grill.

STEP 6



Hold each end of grill and pull to remove grill. Fasteners will be holding grill in place.

STEP 7




Remove 10mm bolt to remove headlight trim.

STEP 8



Remove T-10 Torx screw and 7mm bolt to unclip front of fender trim.

STEP 9

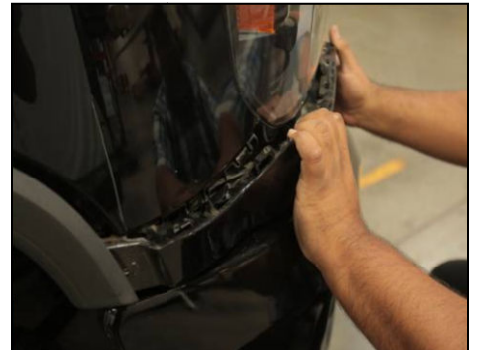

Carefully remove headlight trim.

STEP 10



Remove three 10mm bolts to remove headlight. **Repeat process on other side**

STEP 11



Disconnect main connector then remove headlight. **Repeat process on other side**

STEP 12



Reverse steps 2-11 to complete install of Anzo USA headlights.

STEP 13



Check all functions of light before driving vehicle.