



# TOW MIRROR TUN07HEC



2007-2017  
2008-2017


Toyota Tundra  
Toyota Sequoia



DO NOT OVER-TIGHTEN THE MOUNTING SCREWS. OVER-TIGHTENING THE MOUNTING SCREWS MAY RESULT IN DAMAGE TO MOUNTING PLATE OR HARDWARE.



60-180 min



Cutting Not Required



Drilling Not Required



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.



support@trailfx.com



1 866 638 4870



READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



Limited Lifetime Warranty

## PARTS LIST

SL.No	Part Description	SL.No	Part Description
1	Drivers Side Mirror	2	Passenger Side Mirror

1




2



## TOOLS NEEDED

10 mm Socket (A)	Ratchet (E)
7 mm Socket (B)	T20 Torque Head Bit Tool (F)
Bezel Removal Tool (C)	Phillips Head Screw Driver (G)
Flat Edge Screw Driver (D)	



F



E



A



B



D



G



C

### Installation Instruction


1. Using bezel removal tool remove the plastic cover located behind the door handle, Insert the bezel removal tool in the notch of cover and pop out the plastic cover. See figure 1.




2. Remove the screw behind the door handle using a phillips head screw driver. See figure 2.



3. Using a flat edge screw driver, remove the plastic cover below door handle. Insert the flat edge of the screw driver into the notch of the cover and pop it out. See figure 3.

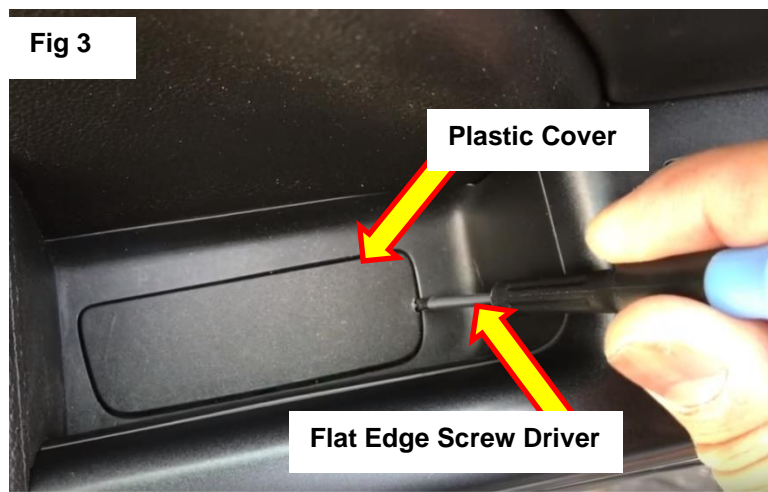

4. Remove the screw inside the door handle storage area using a phillips head screw driver. See figure 4.

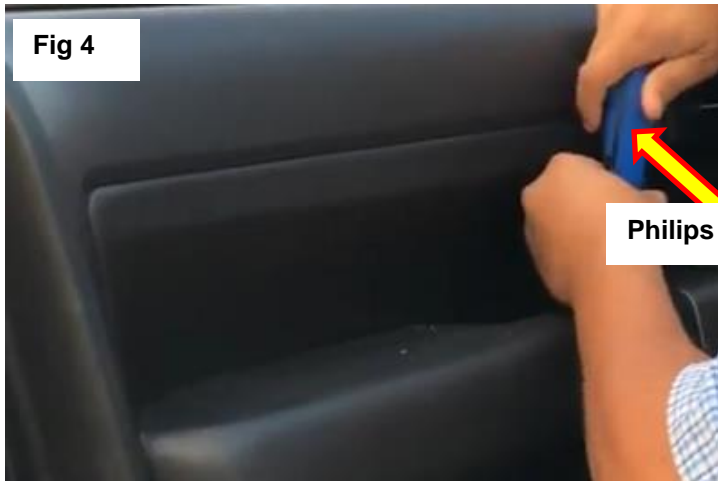

Philips Head Screw Driver

5. Remove all the T20 torque head screws which are located on the outside perimeter of the door using a T20 torque head bit. See figure 5.

**NOTE:** Applicable only if screws are available.




6. Remove the plastic clip near inner corner of the door panel using bezel tool. See figure 6.




7. After removing the screws pull the door panel towards you by lifting the door by hand. See below images.



8. Trim panel is attached to door by two clips. See figure 1. Use a trim panel tool or flat edge screw driver to pop trim panel clips out from the slots in the door. See figure 7.

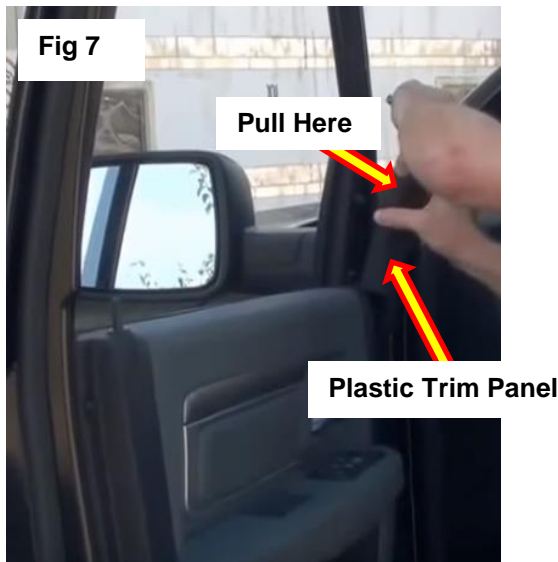

9. Remove the nuts using 10mm socket, ratchet and extensions. See figure 8.

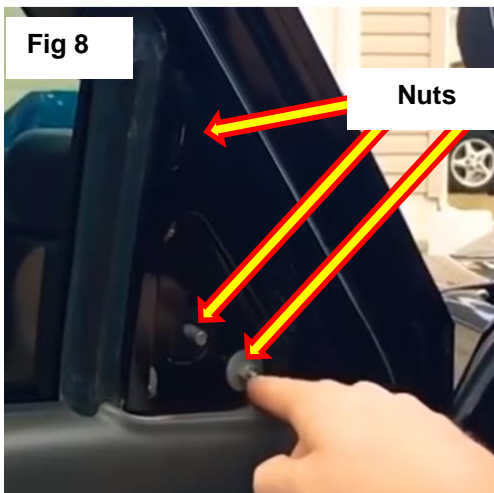

Socket and Ratchet Set

**NOTE:** Ensure one person holds the mirror from the outside when loosening the nuts to prevent the mirror from falling.

10. Unplug the OEM mirror electrical wire from the socket. See figure 9.



11. After all nuts are removed and wire connection is unplugged, slowly remove the OEM mirror from the vehicle.
12. Slide the mirror studs of the new TrailFX tow mirror into the three holes in door.
13. Re-install the washers and nuts using a 10mm socket and ratchet. Once mirror is secure, plug in wiring connection.
14. Insert the New TrailFX mirror wiring harness in to socket. See figure 10.



15. Re-install the plastic trim panel by inserting the plastic clips of the cover into the slot and push into place.
16. After installation, check all mirror functions to make sure they are working properly.

**PRODUCT CARE**

1. Periodically check the product to ensure all fasteners are tightened and components are intact.
2. Regular waxing is recommended to protect the finish of the product.
3. **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and can scratch the finish leading to corrosion, ensure the cloth used for wiping is clean and soft.

**FAQ's**

1. **Tow mirrors are loose after installation.**  
*Please ensure that all required mounting brackets / hardware's are installed & tightened correctly.*
2. **Missing / Excess Hardware.**  
*Re-check hardware count as per the part list.*

Check out these other TrailFX Products!!

www.TrailFX.com



FULL FRONT REPLACEMENT BUMPER



REAR REPLACEMENT BUMPER



3.5 INCH OVAL BULL BAR



6" OVAL BENT STEP BAR

Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.