





# Installation & CARE

## 2015-2018 GMC YUKON PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	7 mm socket	10 mm socket	Plastic Pry bar
			

### PRODUCT NUMBER

2LHP-YUK15-TM  
2LHP-YUK15JM-TM  
2LHP-YUK15G-TM



### LET'S START THE INSTALLATION



**STEP 1**

Raise the hood



**STEP 2**

Remove the six radiator cover fasteners



**STEP 3**

Remove the radiator cover




**STEP 4**

Remove the four 10mm front grille bolts



**STEP 5**

Remove the two 10mm front bumper bolts

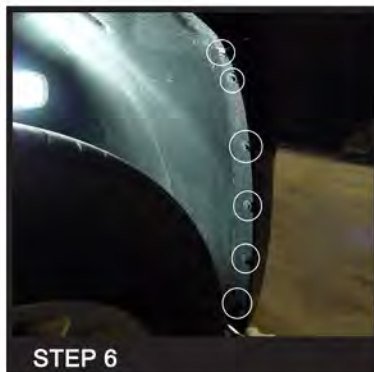


**STEP 6**

Remove the six 7mm wheel well liner bolts



**STEP 7**

Remove the three 10mm bolts on each side located behind the bottom of the front bumper lip

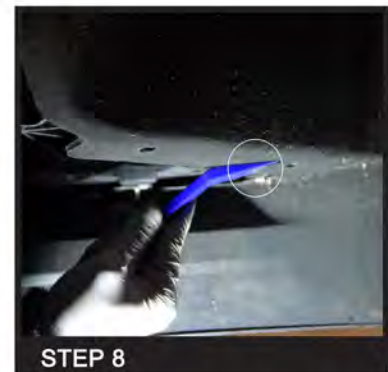

**STEP 8**

Remove one fastener on each side behind the front bumper lip





**STEP 9**

Remove the two lower 10mm bumper bolts



**STEP 10**

Loosen the front grille clip on the right headlight side



**STEP 11**

Loosen the front grille clip on the left headlight side




**STEP 12**

Pull the bumper slightly upward to unhinge




**STEP 13**

Disconnect the fog light connector if equipped

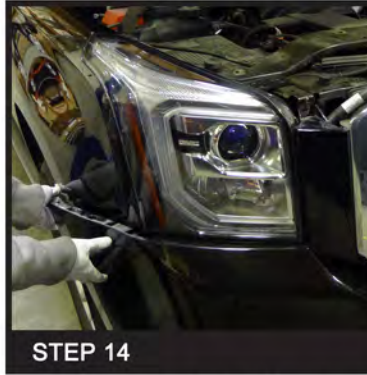

**STEP 14**

Loosen the sides of the front bumper

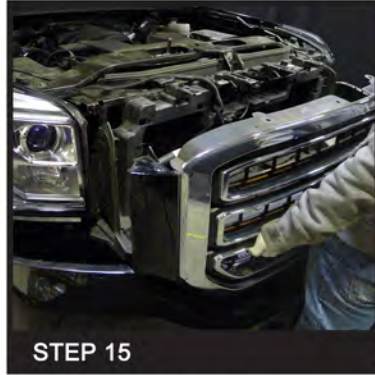

**STEP 15**

Remove the front bumper




**STEP 16**

Remove the two 10mm headlight screws on the top




**STEP 17**

Remove the two 10mm headlight bolts on the bottom

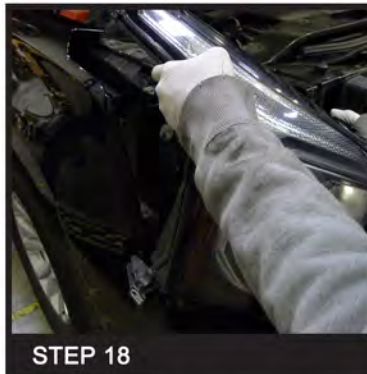


**STEP 18**

Remove the headlight

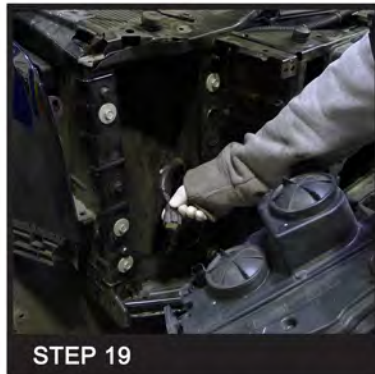


**STEP 19**

Disconnect the harness connector

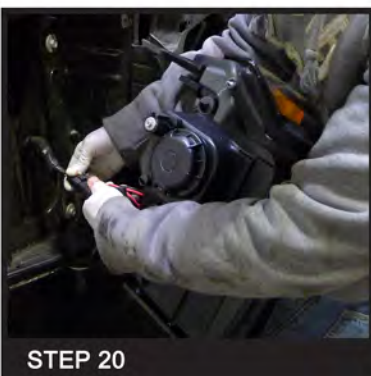


**STEP 20**

Connect the headlight connector

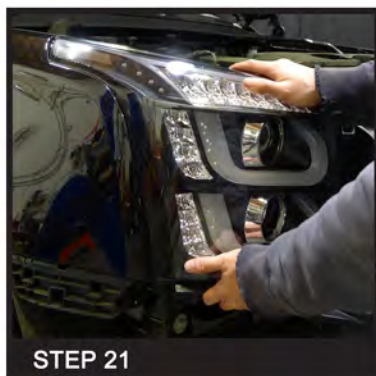


**STEP 21**

Install the headlight

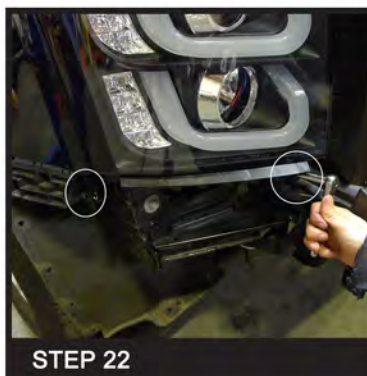

**STEP 22**

Install the two lower 10mm headlight bolts

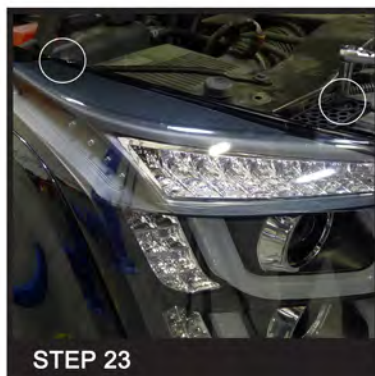

**STEP 23**

Install the two upper 10mm headlight bolts





**STEP 24**

Please repeat the steps from 16 to 23 for the opposite side



**STEP 25**

Reinstall the front bumper



**STEP 26**

Reinstall the six 10mm upper bumper bolts



**STEP 27**

Reconnect the foglight connector if equipped




**STEP 28**

Reinstall the radiator cover



**STEP 29**

Reinstall the six radiator cover fasteners

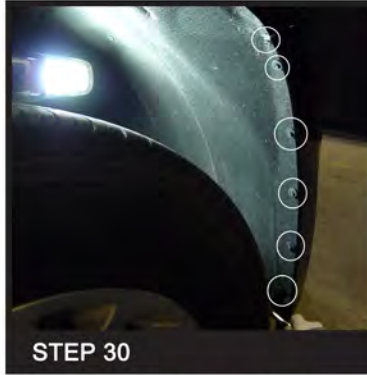


**STEP 30**

Reinstall the six 7mm wheel well liner bolts



**STEP 31**

Reinstall the one fastener on each side located behind the front bumper lip

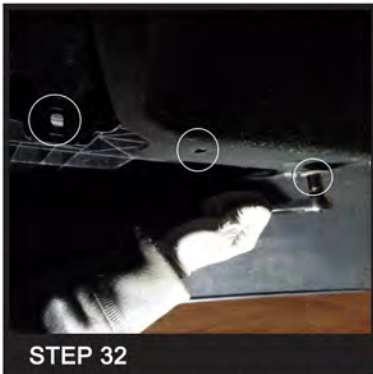


**STEP 32**

Reinstall the three 10mm bolts on each side located behind the bottom of the front bumper lip



**STEP 33**

Reinstall the two rear front bumper bolts

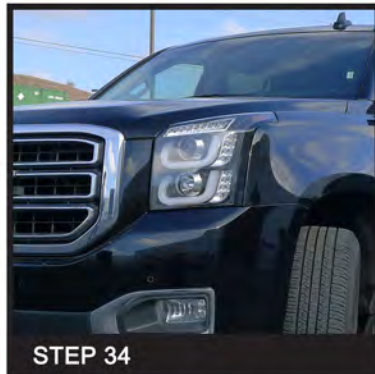

**STEP 34**

Close the hood and complete

## 2015-2018 GMC YUKON PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

## 2015-2018 GMC YUKON PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### ● HIGH / LOW BEAM Adjustment Screw

